

BAR SUPPORTS




SLAB/HORIZONTAL

Bar Chair

Used for supporting wide spaced light steel in slab/deck construction. Stocked, or available, in 3/4", up to 15". To order give height, and specify bright basic, plastic dipped, pre-galvanized wire, hot dipped galvanized, stainless steel wire or epoxy coated.


No.	Size	Description/Legs	Qty/Ctn	Wt/Ctn (lbs)
DS 34BCPD	3/4"	Plastic Dipped	500	25.0
DS 1BCPD	1"	Plastic Dipped	500	40.0
DS 114BCPD	1-1/4"	Plastic Dipped	500	40.0
DS 112BCPD	1-1/2"	Plastic Dipped	500	45.0
DS 134BCPD	1-3/4"	Plastic Dipped	500	50.0
DS 2BCPD	2"	Plastic Dipped	500	60.0
DS 214BCPD	2-1/4"	Plastic Dipped	100	20.0
DS 212BCPD	2-1/2"	Plastic Dipped	100	20.0
DS 234BCPD	2-3/4"	Plastic Dipped	100	20.0
DS 3BCPD	3"	Plastic Dipped	100	24.0
DS 314BCPD	3-1/4"	Plastic Dipped	100	24.0
DS 312BCPD	3-1/2"	Plastic Dipped	100	24.0
DS 334BCPD	3-3/4"	Plastic Dipped	100	24.0
DS 4BCPD	4"	Plastic Dipped	100	31.0
DS 414BCPD	4-1/4"	Plastic Dipped	100	31.0
DS 412BCPD	4-1/2"	Plastic Dipped	100	31.0
DS 434BCPD	4-3/4"	Plastic Dipped	100	31.0
DS 5BCPD	5"	Plastic Dipped	100	50.0
DS 514BCPD	5-1/4"	Plastic Dipped	100	50.0
DS 512BCPD	5-1/2"	Plastic Dipped	100	50.0
DS 534BCPD	5-3/4"	Plastic Dipped	100	50.0
DS 6BCPD	6"	Plastic Dipped	100	59.0

Other sizes available on request.

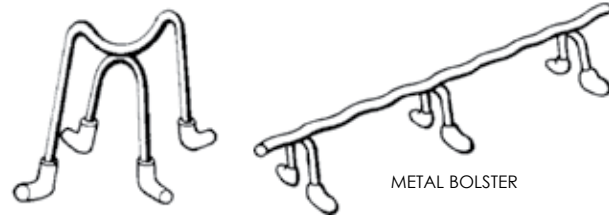

BAR CHAIR

METAL BOLSTER

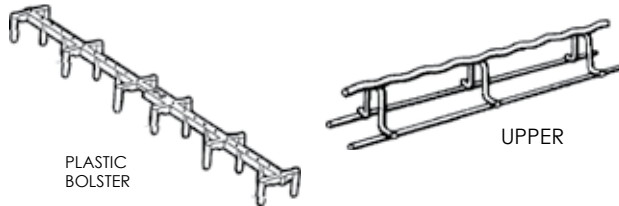


PLASTIC BOLSTER

UPPER

Smart Chair

Constructed with recycled high-strength polypropylene plastic, the chairs are designed to support steel, eliminate wire ties and stop steel displacement. The chairs have a large base for stability. They are available for concrete thickness from 1 1/4" to 3 1/2" and bar sizes from #4 to #5.



No.	Description	Qty/Ctn	Wt/Ctn (lbs)
PM 4112	#4 REBAR...1 1/4" x 1 3/4"	150	30
PM 42	#4 REBAR...1 3/4" x 2 1/4"	100	17
PM 4312	#4 REBAR...3" x 3 1/2"	50	15
PM 5312	#5 REBAR...3" x 3 1/2"	50	15

Slab Bolster

METAL is used for supporting lower slab steel from slab form. Corrugations are spaced 1" on centers and serve as guides for spacing bars. Legs are spaced 5" on center. Available in 3/4" to 3" heights. To order give height and specify bright basic, plastic dipped, pre-galvanized wire, hot dipped galvanized, stainless steel wire or epoxy coated. 5' lengths standard.

No.	Size	Description	Lf/Ctn	Wt/Ctn (lbs)
DS 34SBPT	3/4"	Plastic Dipped	250	25.0
DS 1SBPT	1"	Plastic Dipped	250	25.0

Other sizes available upon request.

Upper Metal:

No.	Size	Description	Lf/Ctn	Wt/Ctn (lbs)
DS 34SBU	3/4"	Plain	100	35.0
DS 1SBU	1"	Plain	100	36.0
DS 112BSU	1-1/2"	Plain	100	40.0
DS 2SBU	2"	Plain	100	42.0

Other sizes available upon request.

Slab Bolster

PLASTIC is manufactured in easy to use 32" lengths that can be installed individually or connected together as the job requires. Made from 100% high strength engineered plastic, this product will not rust or corrode which could lead to premature spalling, discoloration and concrete failure. Concrete color and small footprint make this bolster virtually undetectable after forms are removed.

No.	Size	Lf/Ctn	Wt/Ctn (lbs)
AZ PSB075	3/4"	325	33.0
AZ PSB100	1"	275	27.0
AZ PSB150	1-1/2"	200	25.0
AZ PSB200	2"	150	22.0
AZ PSB250	2-1/2"	125	23.0

Other sizes available upon request.