



BAR SUPPORTS

M A S C O . N E T

SLAB/HORIZONTAL

Preco Clip

For the positioning of horizontal reinforcement. Design allows for easy flow of concrete for maximum bond.


No.	Description	Size	Qty/Ctn	Wt/Ctn (lbs)
PK F	#3, 4,5 Bar	3/4"	4500	49.0
PK H	#4,5,6 Bar	1"	3000	37.0
PK J	#2,3 Bar	1½"	2000	34.0
PK K	#4,5,6 Bar	1½"	2500	47.0
PK M	#4,5,6 Bar	2"	1000	25.0



Barspan Wheel

General purpose circular spacers accommodates larger range of bar diameters. Heavy duty design easily supports extra loads.

No.	Description	Coverage	Qty/Ctn	Wt/Ctn (lbs)
AZ PSW075/4	#2-4 Bar	3/4"	1150	19
AZ PSW100/6	#3-6 Bar	1"	500	26
AZ PSW150/6	#3-6 Bar	1-1/2"	300	14.0
AZ PSW200/6	#3-6 Bar	2"	350	24.0
AZ PSW300/6	#3-6 Bar	3"	350	18.0
Snaplock				
AZ PLW150/4HD	#3,4 Bar	1-1/2"	215	25
AZ PLW150/6HD	#5,6 Bar	1-1/2"	200	23.0
AZ PLW300/6HD	#5,6 Bar	3"	50	17.0

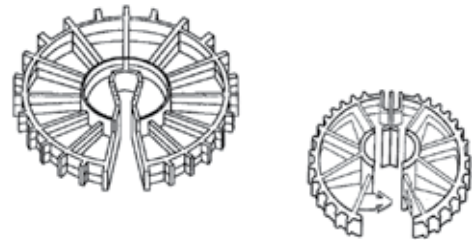

Preco Wheel



Suitable for spacing concrete reinforcement in columns, walls, piles and precast units.

No.	Description	Coverage	Qty/Ctn	Wt/Ctn (lbs)
PK W1534	#3, 4 Bar	1½"	500	20.0
PK W2004	#3, 4 Bar	2"	500	20.0
PK W3004	#4 Bar	3"	250	20.0
PK W4005	#5 Bar	4"	100	10.0

Dobie

A superior concrete spacer block for use in reinforced concrete construction. Made from high density/strength concrete, these dobies offer an equal coefficient to expansion and adhesion properties that eliminate cracking and corrosion.

No.	Size	Wt (lbs)	Qty/Pallet
CT 1D	1" w/wire	0.36	100 bag, 6,000
CT 112D	1½" w/wire	0.55	100 bag, 5,760
CT 2D	2" w/wire	0.67	4,800
CT 212D	2½" w/wire	1.40	2,160
CT 23COMBO	2" x 3" w/o wire	1.40	2,700
CT 3D	3" w/wire	2.00	2,160
CT 3DWO	3" w/o wire	2.00	1,350
CT 4D	4" W/Wire	3.0	972
Sewer Brick			
B 428SG	2-1/4" x 3-5/8" x 7-5/8"	4.90	720



Rebar Saddle

Rebar Saddles are made of high quality pvc plastic. They are designed to fit over the top of a piece of #4 rebar, and have another piece of #4 rebar snapped inside of its clip type opening.

No.	Qty/Box	Wt/Ctn (lbs)
CFA RS	3,000	27.0