


SCREEDS

SLAB/HORIZONTAL

Bar

1/2" x 2" x 10 ft. bar, for use with the 1/2" x 2" screed hook. Not for use with power screeds.

No.	Wt (lbs)
CT 10SB	33.4



Brackets

Available for 1/2"x 2"x 10' flat bar or 2x4's. Use with 3/4" round stakes. Not for use with power screeds.

No.	Size	Wt (lbs)
CT SB24	2"x4"	0.67
CT SB122	1/2"x2"	0.61



Hanger

Made of spring steel to snap on 3/4" steel stakes for 2X4'S. 100 pieces per carton.

No.	Wt (lbs)
CT WSB	0.19




Metal Key Way

Screed Key is available in heights of 3-1/2", 4-1/2" 5-1/2", and 7-1/2" for use in 4", 5", 6" and 8" on grade concrete floor slabs. Screed key gives you a smooth, flush surface joint which requires no filling. Minimizes random cracking and provides proper load transfer from slab to slab. 10 pieces per bundle. Not for use with power screeds.

No.	Size	Wt (lbs)
CT 312KK	3-1/2'x10'	3.7
CT 412KK	4-1/2'x10'	4.5
CT 512KK	5-1/2'x10'	5.4
CT 712KK	7-1/2'x10'	7.1

Stakes - No.	Size	Wt (lbs)	Pcs/Ctn
CT 12KKS	12"	0.22	100
CT 15KKS	15"	0.27	100
CT 18KKS	18"	0.33	100
CT 24KKS	24"	0.43	100

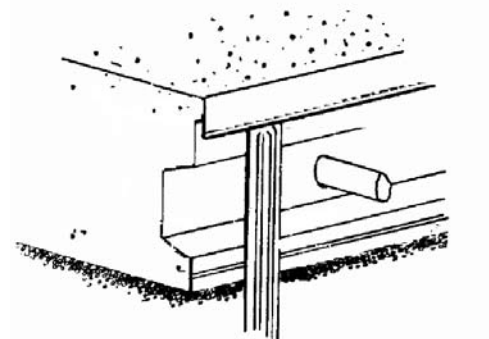

stakes

Plastic Cap

Where joint sealants are specified, plastic cap strip should be used. It is easily removed after the concrete hardens, leaving a wedge shaped joint for easy and economical sealant application.

No.	Size	Wt/Ctn (lbs)
DS 20550	500 LF Roll	20.0

